


# PFA Lined Flange Butterfly Valve for Oil Gas

**Model: ED341PFA**

1. The lined butterfly valves bi-directional flow is possible at maximum operating pressure. Since the valve port corresponds to the piping diameter, a high flow capacity is guaranteed.
2. It features ease of maintenance, repeatable on-off, long life durability.
3. The concentric design is commonly used in the power generation, brewing, water and food industries and suitable for both gaseous and liquid service. Typically applied in chemical/petrochemical process, food and beverage, and pulp and paper etc.
4. Lining material: PTFE, PFA, FEP, GXPO etc.
5. Connection type: Wafer, flange, lug etc.
6. Operation methods: Manual, worm gear, electric, pneumatic and hydraulic actuator.
7. Elite lined three-way ball valves are available as per the needs of applications in additional sizes and other than standard materials.

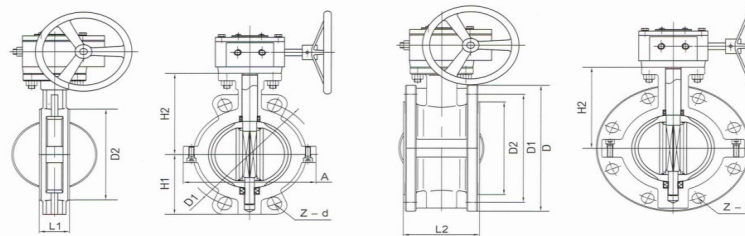

<b>Design/Manufacturer Standard</b>	ASME B16.34, HG/T 3704
<b>Face-to-face Dimension</b>	ASME B16.10, GB/T 12221
<b>Flange Standard</b>	ASME B 16.5 ,GB/T 9119 ,DIN ,JIS
<b>Inspection and Testing</b>	API 598, GB/T 13927

Model NO.: ED341PFA  
 Connection Form: Flange  
 Seal Form: Auto Sealed  
 Work Pressure: Low Pressure (Pn<1.6mpa)  
 Material of Seal Surface: Soft Sealed  
 Application: Industrial Usage  
 Pressure: 150lb  
 Specification: CE, SGS, TS, GMC  
 HS Code: 8481804090

Driving Mode: Manual  
 Structure: Centre Sealing  
 Valve Stem: Normal  
 Working Temperature: Normal Temperature (-40°C<T<120°C)  
 Valve Body: Casting  
 Body Material: Wcb+PFA  
 Diameter: Dn50~2000  
 Transport Package: Plywood